


TREE MANAGEMENT NOTES:

- Hydrovac new street lighting utilities.
2. Lighting pole must be outside of dripline of tree.
3. Severance of roots up to 30mm in diameter is supported if roots greater than 30mm in diameter are uncovered while digging the exploratory trench, the contractors must contact Urban Treescapes and provide photos of the roots to enable UTS officers to determine if the root severance will undermine the health or stability of the tree.
4. Contractor vehicles are not to park on the verge or within the TPZ of street trees during construction.
5. Materials are not to be stored within TPZ.
6. If pruning is required, to existing trees, the applicant will need to provide information about the proposed work for review and approval. Information must include photos indicating where the branches will be cut. Pruning must not be undertaken without written support from Urban Treescapes.

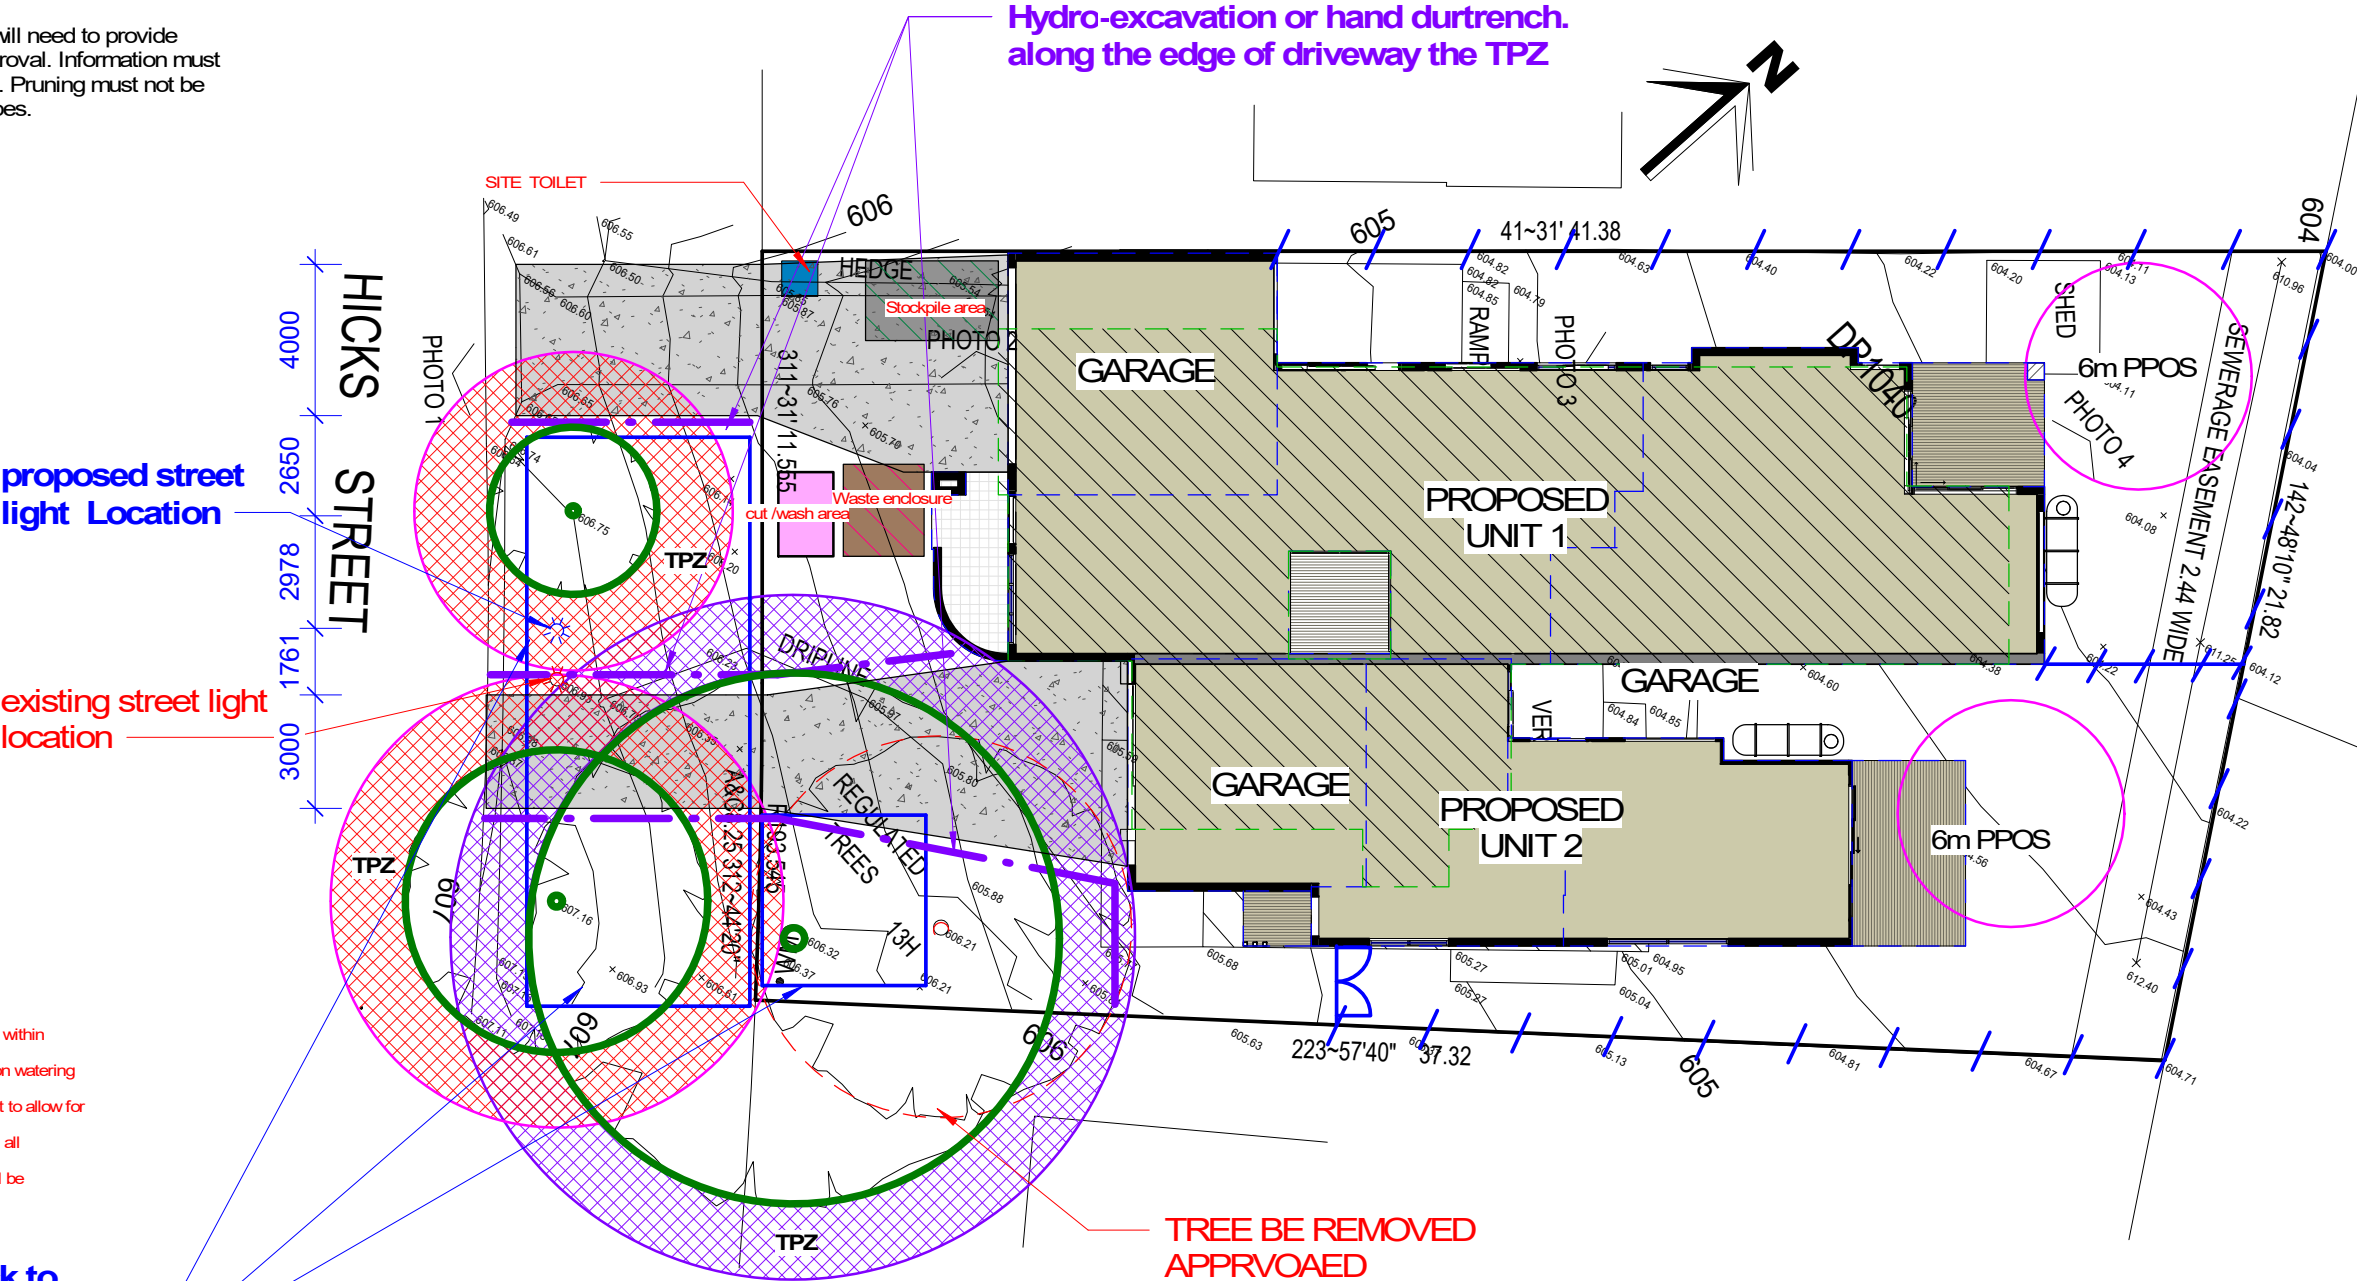

- Note:
- 1.solid tree protection fencing must be installed and remian throughout all stages of construction.
 - 2.tree protection fencing of 1800 high (chain mesh or solid fixed fencing) must be installed around tree protection zone(dripline plus two meters)
 - 3.the tree protection zone must not be entered or used for any of the following throughout all stages of construction.
 - 4.No parking or storage of vehicles or machinery allowed within the tree protection zone.
 - 5.No building materials or building waste are to be stored within the tree protection zone.
 - 6.The mixing or storage of chemicals and fuels are not permitted within the protection zone.
 - 7.mulching of an organic wood chip to a depth of 50mm covering the ground within the tree protection will be required.
 - 8,the tree protection zone and mulched areas are to be kept moist by irrigation watering at least once a week in dry conditions.
 - 9.the tree protection fencing may be removed at the section of encroachment to allow for construction.
 - 10.While the absence of the tree protection fencing to allow for construction, all conditions must be adhered to as if the fencing was still in place.
 - 11.No more than a ten 10%encroachment within the tree protection zone will be allowed for construction.

Existing tree on adjoining block to be protected during construction at all times. Provide 1.8m high fence for tree protection. No part of fence will encroach over block boundary or make contact with tree.

PROJECT NAME: PROPOSED NEW RESIDENCE			BLOCK: 54 SECTION: 10 SUBURB: RED HILL			TITLE: TREE MANAGEMENT PLAN			CLIENT: JOHN			SCALE: 1 : 200@A3			DATE: 28-10-25			DRAWN BY: JASON.C			JAST DESIGN TEL: 0451 163 306 EMAIL: Info@jastdesign.com.au					
SHEET No: A 02												JOB NO: 20002			CHECK BY: LEO.H											

